




DRB007F-PTE




DRB007F-DR

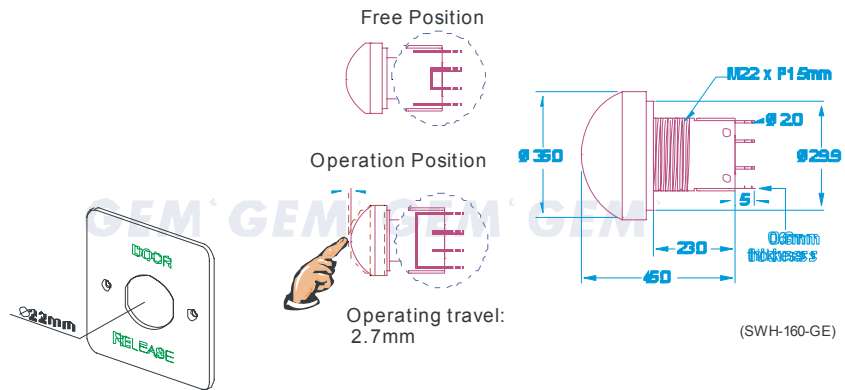

Switch Specifications

Max. Ratings : 5A@125/250 Vac
 Type of actuation: Momentary
 Contact arrangement: Double pole double throw
 Operating travel: 2.7mm
 Operating temp. Range: -20~+70°C
 Contact resistance: 50m Ω Max.(initial)
 Operating life(Mechanical) : Over 100,000 times

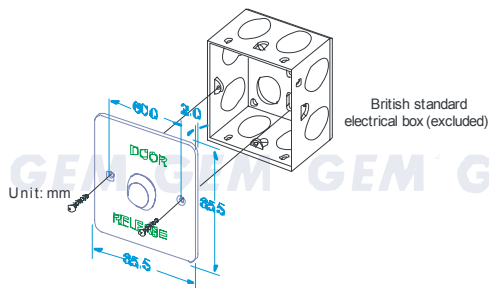

This series of request to exit can be mounted directly in British standard electrical box (Flush mount)

Materials(Button): Zinc alloy, Faceplate: Stainless steel



Surface mounting Installation: DRB-SH housing is optional for surface mount.