


# Plan 1

(Door)

## Entryphone® 200 PTS Video Wiring Diagrams

VIDEO

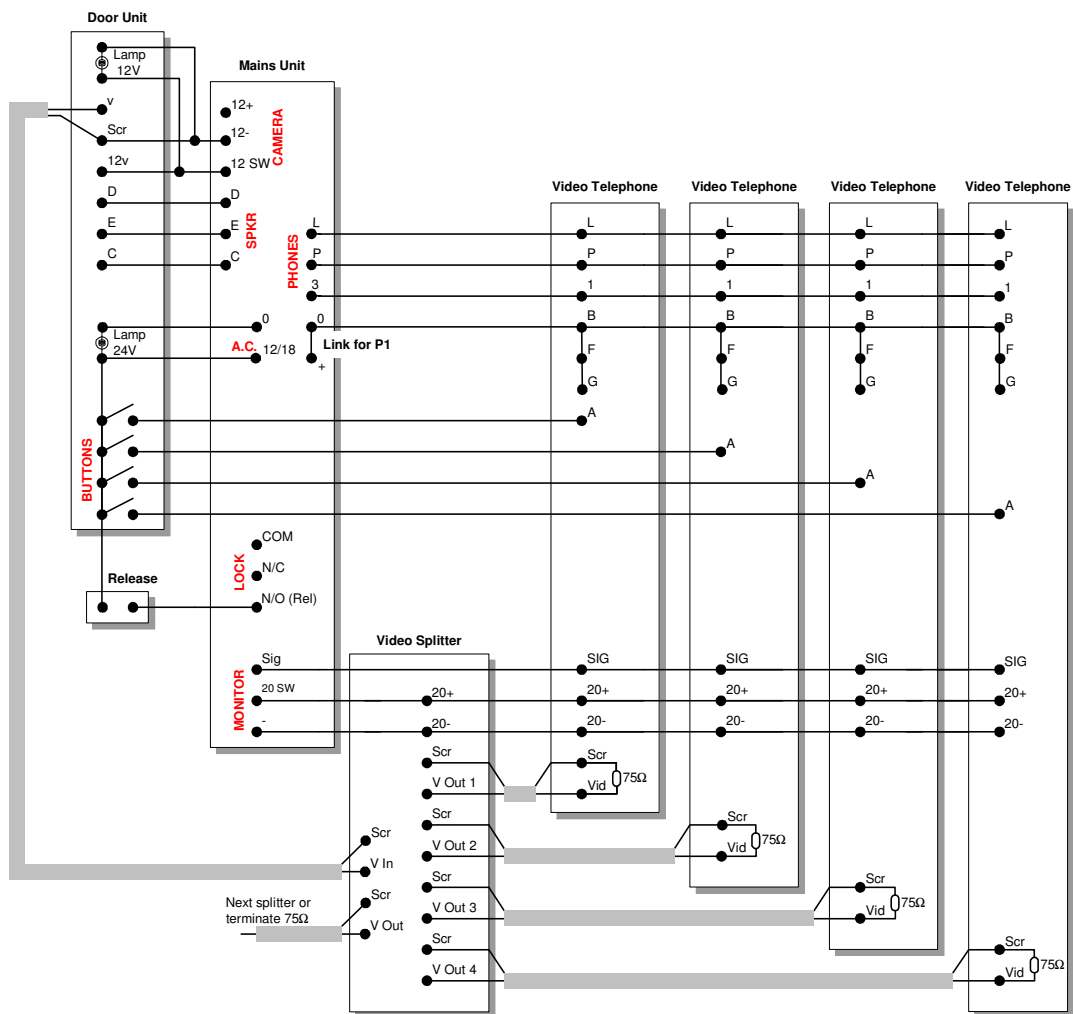

### Operation

Plan 1 provides calling and audio visual communication and remote door opening for as many answer points as required. The video telephone is activated for a preselected time when it is called.

### Notes

- If too many telephones are called at once the system will reset.
- Lamps:  
24 volt festoon lamp is for back lighting (multi-button panels only)  
12 volt festoon lamp is for video subject lighting.
- 75 ohm termination resistors are fitted in each phone and are required at all co-axial line ends. If there are two monitors on one splitter output then the termination resistor must be on the furthest monitor only.
- Colour, contrast and brightness are set at manufacture. There are controls on the circuit board that are not available to the user

- Lock Button Mode - (Default always)  
By default the release button will always work (jumper right)

jumper left = the release only works when the video screen is on.

jumper off = the release only works after a call has been answered

#### PROBLEM?

PLEASE DO NOT HESITATE TO CONTACT OUR TECHNICAL DEPARTMENT  
WE ARE HERE TO HELP!

020 8870 8635

#### Jumper options

- Press-to-Speak Start - (Default on)  
If the jumper is removed the phone cannot be turned on locally
- Auto-On - (Default on)  
If this jumper is removed the phone will not turn on when called.