



G2 chart

PSTN Line for built in communicator

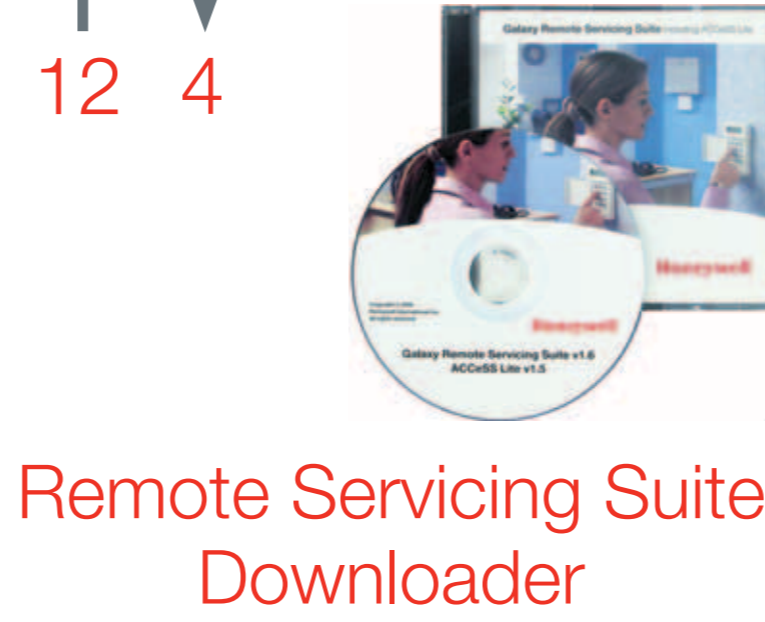


Common features for G2-20 and G2-44+

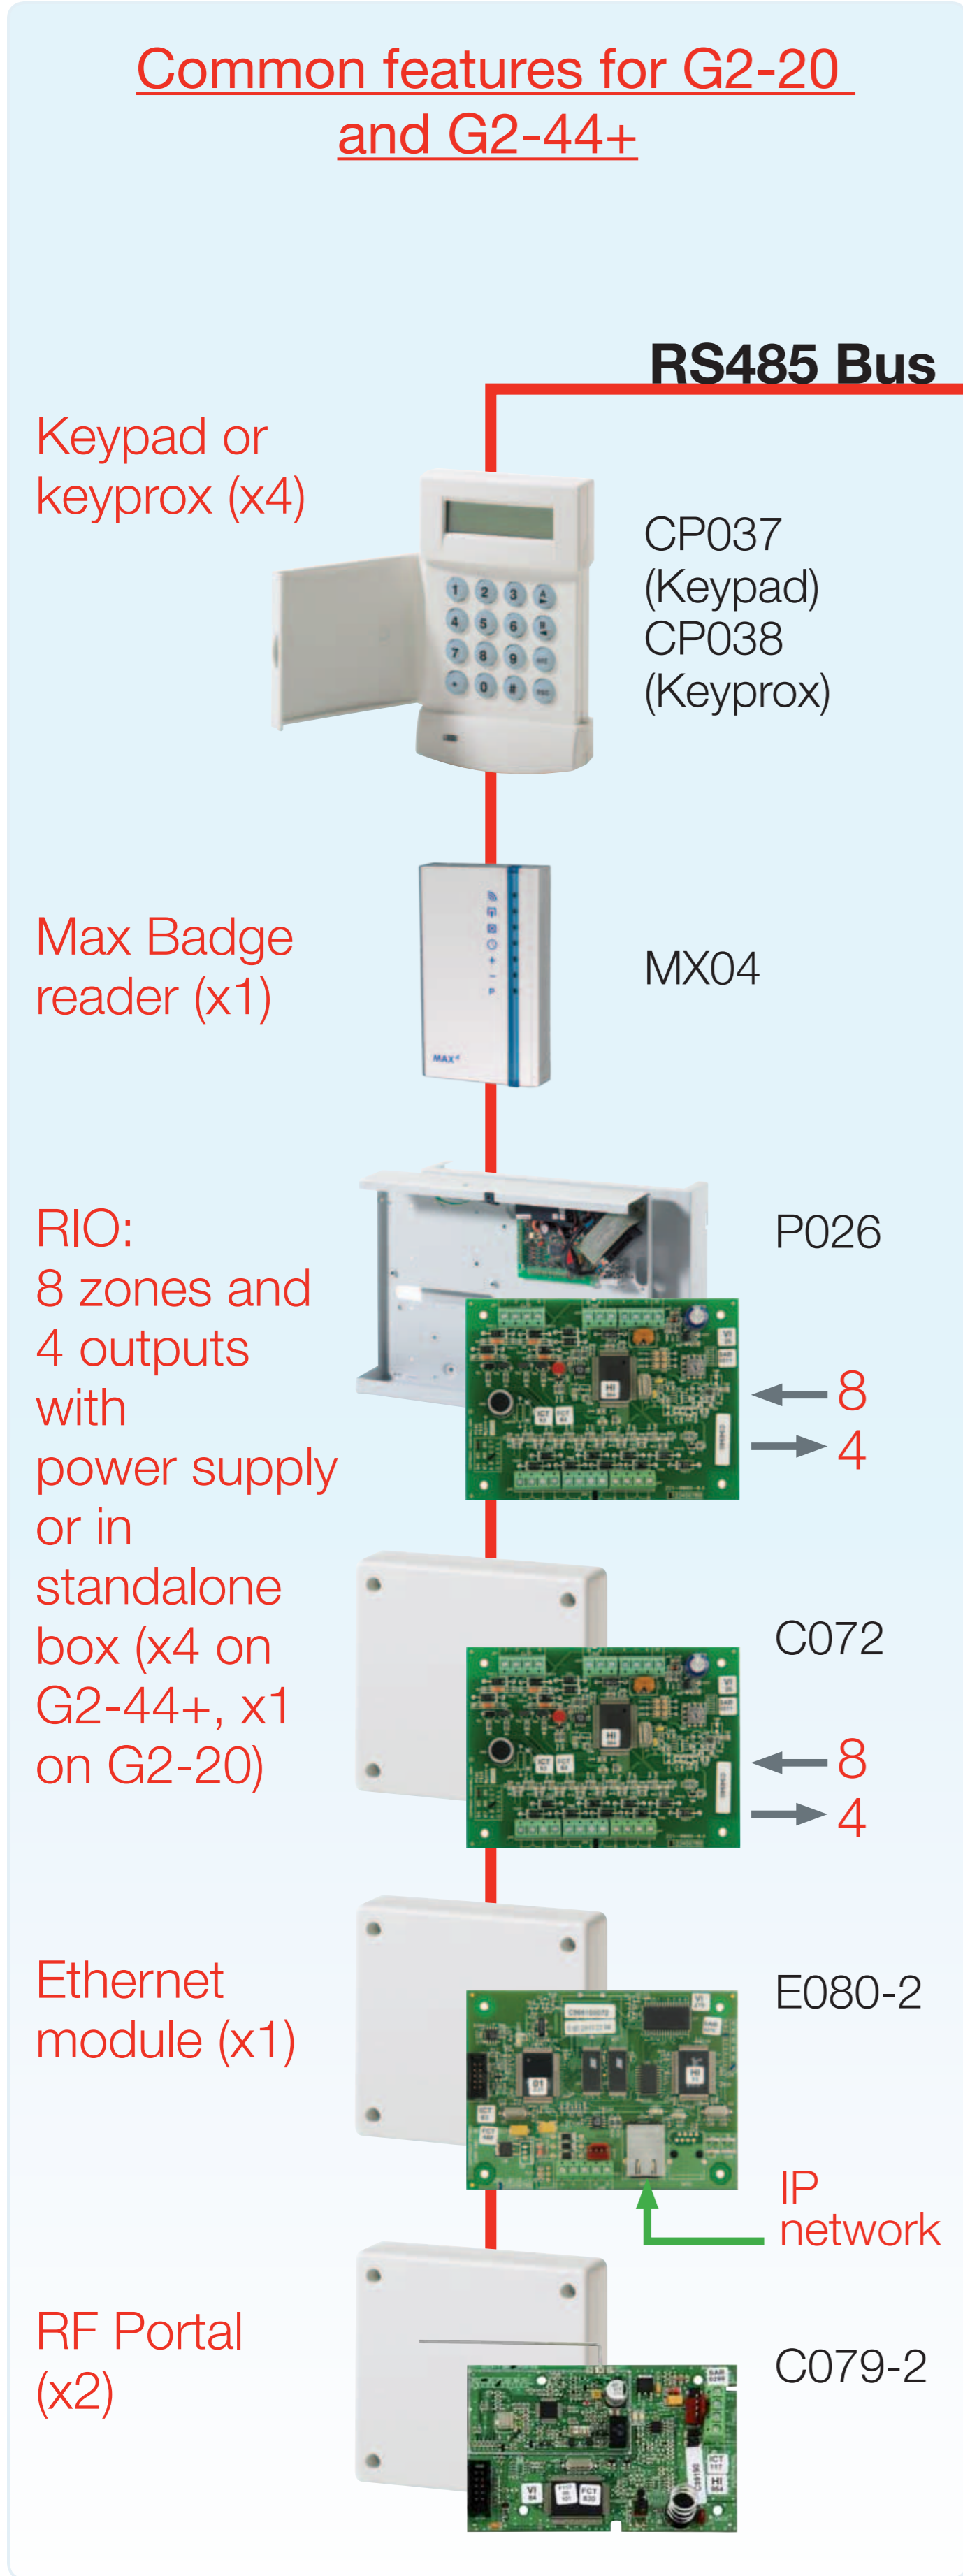

Two twisted pairs screened cable, Belden 8723 or equivalent. 1km maximum. (100m is using standard 4 core cable)

Standard 4-core cable, 100m Maximum. Star or daisy chain wiring structure


Extra features for G2-44+ version

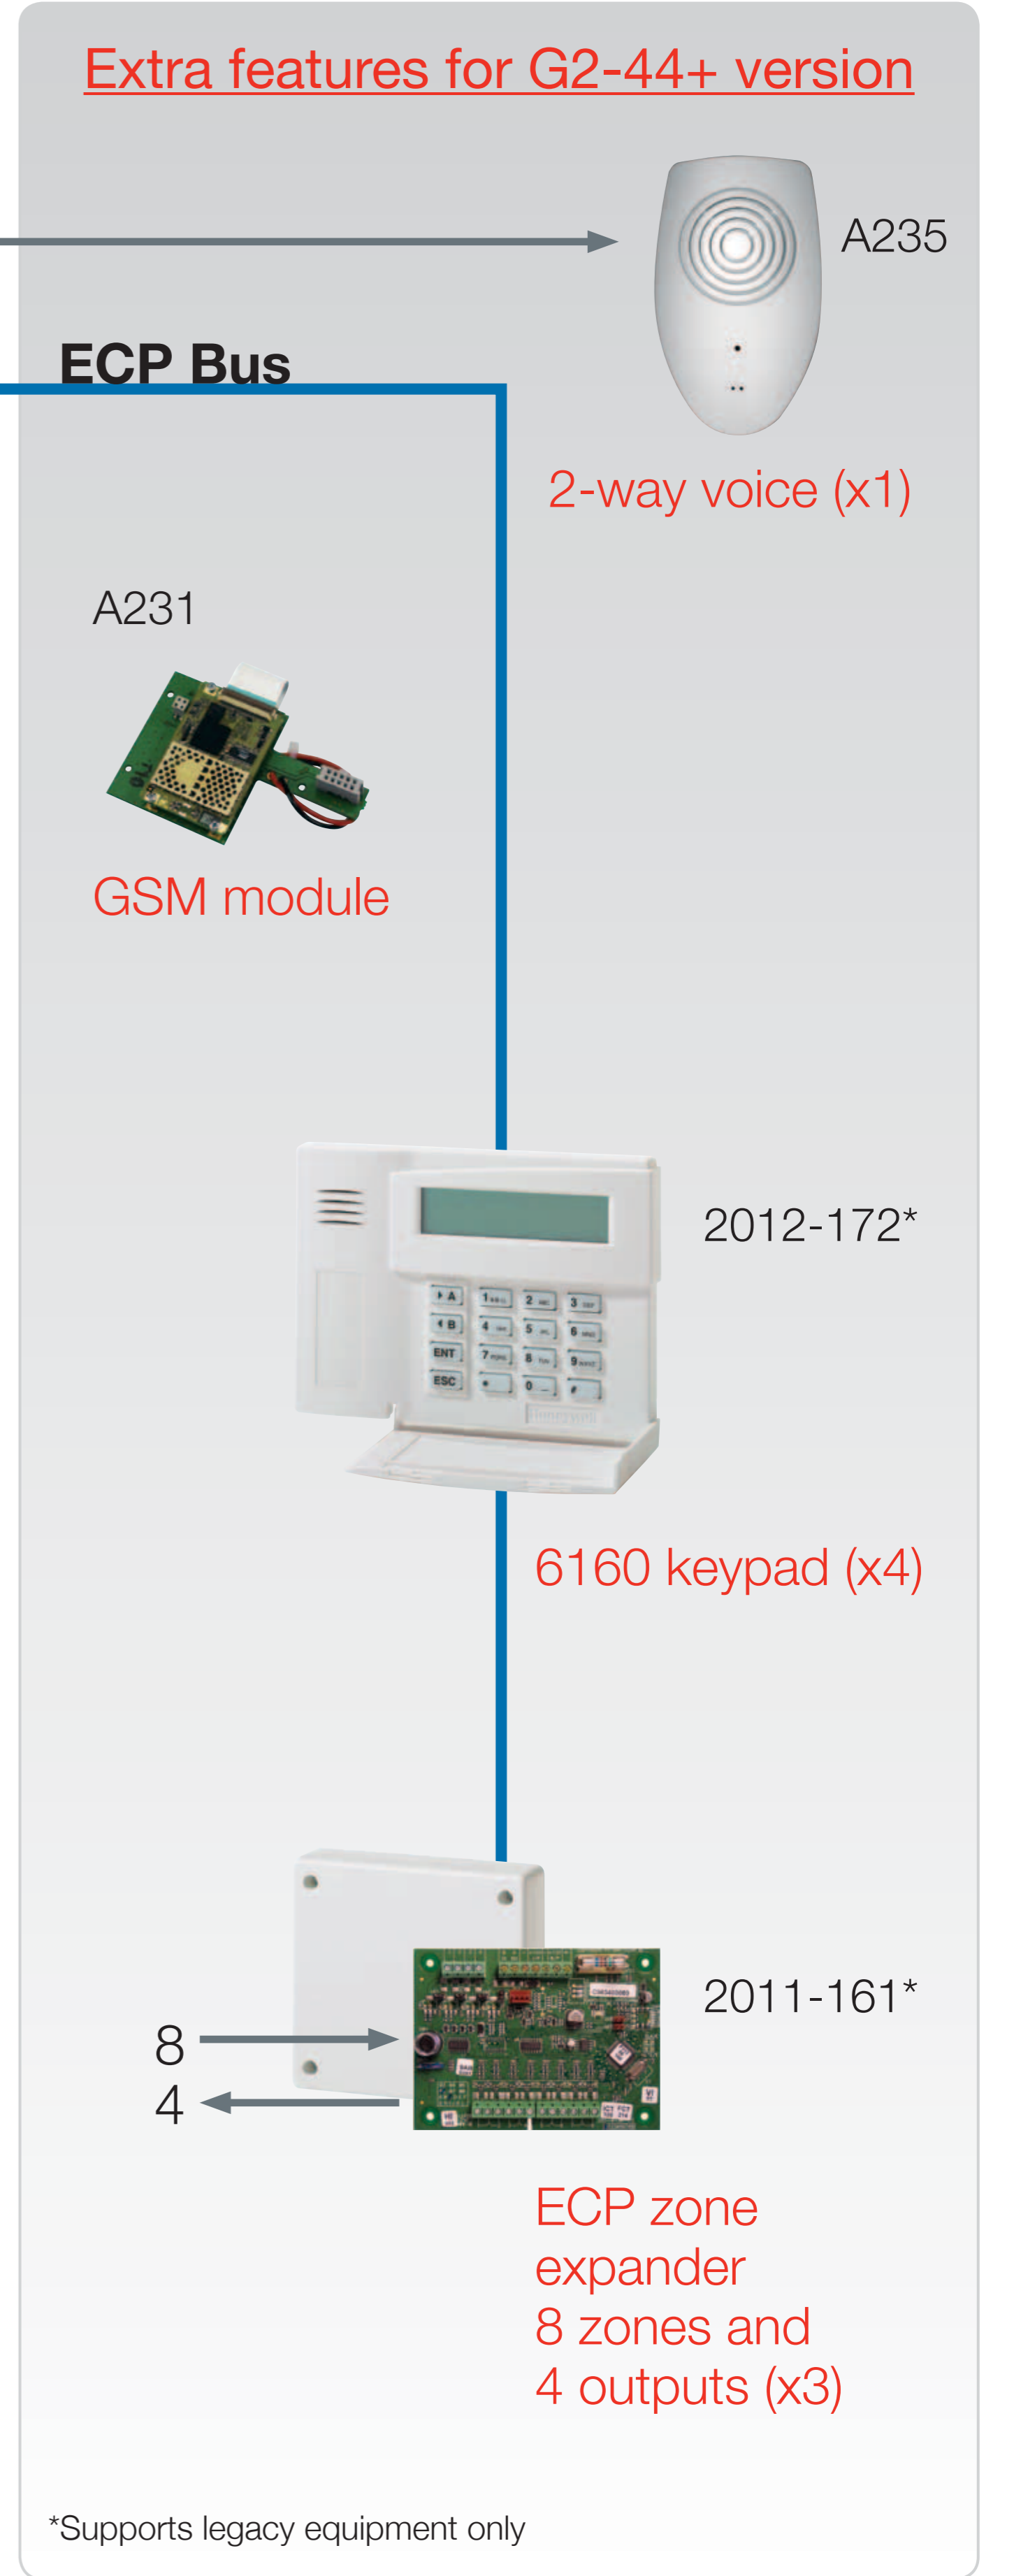


*Supports legacy equipment only

Honeywell wired series

PIRs IntelliSense®

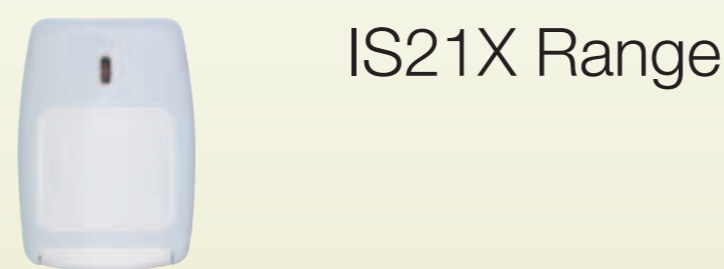

DUAL TEC®

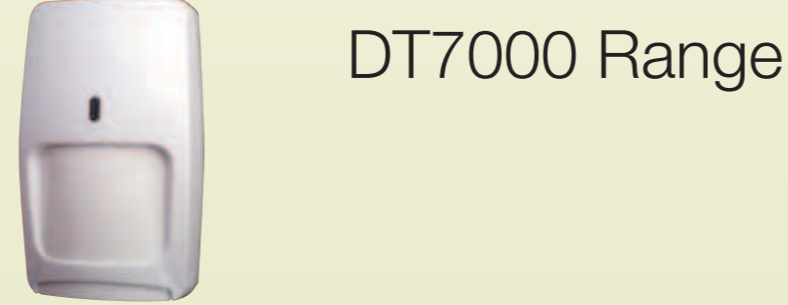

Glassbreak Flexguard®



Wireless sensors range



New
DT8M/DTPI8M
Wireless DUAL TEC® Motion sensor

New
FG8M
Wireless Acoustic Glassbreak sensor

New
SHK8M/SHK8M
Wireless piezo shock sensor

New
DET8M
Wireless flood & temperature sensor

DO800M
Small Door Contact

DODT800GY-B / DODT800M
Door Contact

IR8M/IRPI8M
PIR sensor/ Pet immune version

DF0800M
Smoke Detector

TCB8M
Remote keyfob

TCBPA8M-1
PA Button

NOTE: New sensors valid for G2 panel firmware from version V1.5 onwards. Compatible across the Galaxy® Range